2018 Surface Water Small Project



2nd Avenue NE north of NE 167th St (Work Order #3283) Infiltration Trench Installation


Drainage improvements are coming to your street!

This project will install a new catch basin and infiltration trench. This work will improve drainage and reduce ponding on 2nd Avenue NE north of NE 167th Street.

Project Improvements:

This project will install a new catch basin on the west side of 2nd Avenue NE replacing a small storm drain. This drain does not function well and leads to regular ponding of the street. A buried infiltration trench will be installed on the east shoulder of 2nd Avenue NE to manage runoff, just north of the driveway to 126 2nd Ave NE. The infiltration trench will be approximately 8 feet wide by 60 feet long. The shoulder area on top of the infiltration trench will be restored with grass seed. A new pipe will be installed between the new catch basin and new infiltration trench. The asphalt driveway apron crossing the shoulder will be repaved for better drainage.

The conceptual sketch below shows the proposed work on 2nd Ave NE (looking north).

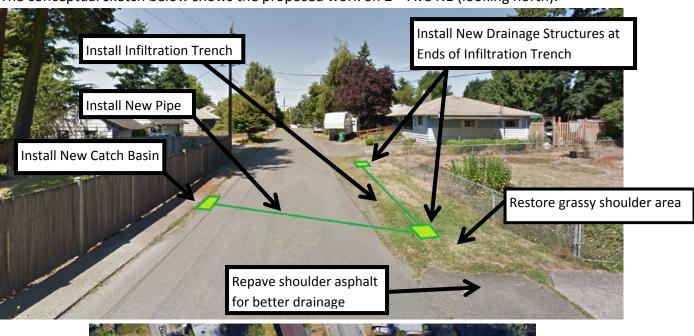



VICINITY MAP



2018 Surface Water Small Project



2nd Avenue NE north of NE 167th St (Work Order #3283) Infiltration Trench Installation

During Construction:

Peak construction activities should be limited to just a few days. The overall duration of construction activities may be spread out over a few weeks. Temporary construction impacts may include but are not limited to:

- Short-term unavailability of some on-street parking within or near the work area.
- Temporary loss of two-way travel on 2nd Avenue NE during active construction.
 - Local access will be maintained at all times; travel lane impacts will be limited to between 7am and 6pm on weekdays. The duration of such impacts is not expected to be more than a few days.
- Temporary loss of driveway access (only for driveways within or near the work area).
 Residents will be notified in advance of any construction activity blocking a driveway.
 We will work with residents to minimize disruptions from driveway access issues.
- Disturbances to landscaping, signage, and paving within the right-of-way

Following Construction:

- You should notice improved drainage.
- General condition of construction site will be clean and restored to match preconstruction conditions, or better.
- Asphalt pavement and concrete curb and sidewalk will be neatly patched, as needed.
- Landscaped areas will be restored. Areas seeded for grass may not grow until later in the fall. Interim measures to prevent erosion and soil loss may be installed.

The City will respond to any questions, complaints, requests, or concerns as soon as possible.

Construction is scheduled for mid- to late-summer 2018; notice will be sent to confirm dates once known. Project website (listed below) will be updated as the project advances.

NOW is the time to ask questions or provide comments regarding this work. Please reference Work Order #3283.

Please contact Project Manager Lea Bonebrake at:

LBonebrake@shorelinewa.gov - or - (206) 801-2475

Project Website: http://www.shorelinewa.gov/government/projects-initiatives/surface-water-small-drainage-projects