

2018 Surface Water Small Project

15th Avenue NW south of NW 198th Street (Work Order #7317)

Asphalt Berm and Catch Basin Installation




Drainage improvements are coming to your street!

This work will prevent stormwater from flowing off 15th Avenue NW pavement onto adjacent properties to the west. This runoff will be routed into the public storm drainage system.

Project Improvements:

Currently, stormwater from 15th Avenue NW south of NW 198th Street runs off to the west. This drainage path can cause problems at multiple homes on the west side of the street. This project will install an asphalt berm and new catch basin and on the west shoulder of 15th Avenue NW. The new 180-foot long, 2-inch tall asphalt berm will intercept runoff and direct it south to a new catch basin. The new berm will run along the west shoulder in front of 19727, 19719, and 19709 15th Avenue NW. The new catch basin will be located in the gravel shoulder in front of 19709 15th Avenue NW. A new pipe will connect the new catch basin to an existing catch basin on the east side of 15th Avenue NW. Impacted shoulder areas will be restored with gravel to match the existing condition.

The conceptual sketch below shows the proposed work on 15th Avenue NW (looking north).

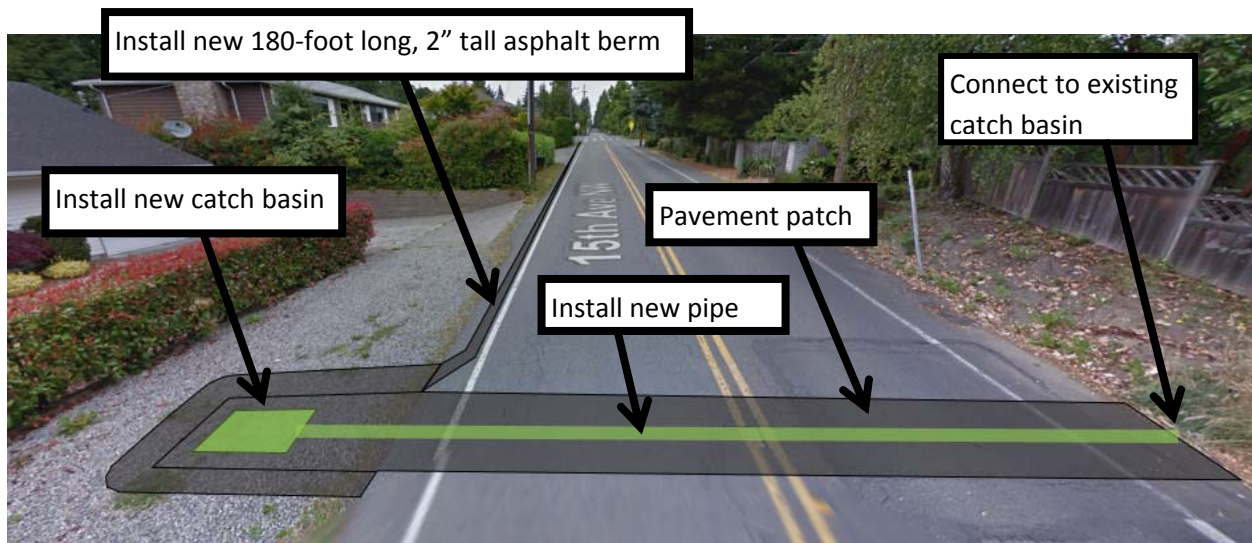

2018 Surface Water Small Project
15th Avenue NW south of NW 198th Street (Work Order #7317)
Asphalt Berm and Catch Basin Installation



During Construction:

Peak construction activities should be limited to just a few days. The overall duration of construction activities may be spread out over a few weeks. Temporary construction impacts may include but are not limited to:

- Short-term unavailability of some on-street parking within or near the work area.
- Temporary loss of two-way travel on 15th Avenue NW during active construction.
 - Local access will be maintained at all times; travel lane impacts will be limited to between 7am and 6pm on weekdays. The duration of such impacts is not expected to be more than a few days.
- Temporary loss of driveway access (only for driveways within or near the work area). Residents will be notified in advance of any construction activity blocking a driveway. We will work with residents to minimize disruptions from driveway access issues.
- Vegetation within the right-of-way may be trimmed for construction access.
- Disturbances to landscaping, signage, and paving within the right-of-way.

Following Construction:

- Asphalt berm will protect residents to the west from roadway runoff.
- General condition of construction site will be clean and restored to match pre-construction conditions, or better.
- Asphalt pavement will be neatly patched, as needed.
- Disturbed landscaped areas will be restored. Areas seeded for grass may not grow until later in the fall. Interim measures to prevent erosion and soil loss may be installed.

The City will respond to any questions, complaints, requests, or concerns as soon as possible.

Construction is scheduled for mid- to late-summer 2018; notice will be sent to confirm dates once known. Project website (listed below) will be updated as the project advances.

NOW is the time to ask questions or provide comments regarding this work.

Please reference Work Order #7317.

Please contact Project Manager Lea Bonebrake at:

LBonebrake@shorelinewa.gov - or - (206) 801-2475

Project Website:

<http://www.shorelinewa.gov/government/projects-initiatives/surface-water-small-drainage-projects>